Title:			•
Fort Macleod Pathways			
RFQ Identification Number:			Maria de la companya della companya
ToFM-FAC-RFQ-2025-015		F	ort Macleod
Administered by:	Brennan Orr, Director of Operations	Initiation Date:	2025.08.26
Contact:	operations@fortmacleod.com, (403) 553-4425	Close Date:	2025.09.12

### 1 Introduction

The Town of Fort Macleod is requesting quotations from individuals or contractors with experience in asphalt pathways.

- Interested parties must have proof of liability insurance, registered with WCB Alberta, hold a valid Town of Fort Macleod Business License, and detailed information on criteria for payment
- 2. The Town of Fort Macleod reserves the right to reject any and all bids
- 3. The Town of Fort Macleod has the right to select the proposal that best satisfies its interests and not necessarily on the basis of price or any other single factor
- 4. The town will not be liable for any additional work or damages directly attributed to neglect or poor workmanship of the prime contractor or any of their subcontractors

# 2 Scope

The Town of Fort Macleod will require the successful party to:

- Assess the location and condition of the pathway
- Coordinate all traffic controls, road closures, and communicate with the town for resident awareness
- Manage all equipment as well as worker safety and incident investigations
- Manage all dust controls during construction activities
- Execution of work
- Mob and Demob

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	0, 410 20 <sup>th</sup> St

### 3 Schedule

The Town of Fort Macleod will require an estimated schedule of procurement, execution and finishing. The successful party will coordinate:

- Site inspections to ensure understanding of the details of the bid, make any
  efficiency suggestions for the course of work
- Highlight any material delivery delays
- Efficient coordination of multiple potential tenders in town
- Traffic controls
- Work execution

### 4 Details

### 4.1 Lyndon Road Scope

#### 4.1.1 Scope details:

- Traffic control
- Subgrade prep is out of scope. This work will be completed independently
  - 887m length of gravel swath
  - Allowing for 2m wide asphalt path
- Asphalt path
  - 887m length
  - 2m wide pathway
  - 90mm depth Type 3 Asphalt
- Demob of equipment and waste materials

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	20, 410 20 <sup>th</sup> St

## 4.1.2 Lyndon Road Location / Area:


Figure 1



Note: Orange-highlighted rectangle designating area of work

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	20, 410 20 <sup>th</sup> St

Figure 2

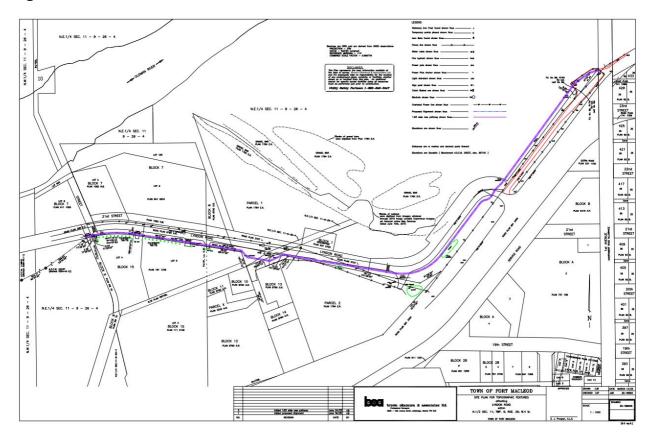

**Note:** Details on pathway location where subgrade will be completed independently of this scope

### 4.2 Wilderness Park

This work is within a wilderness area with trees and shrubs on the pathway edges. Care needs to be taken to minimize impact on surrounding areas as work is taking place.

Scope of work is to pave over the existing pathways as well as pave the existing parking lot with an expansion to the west.

## 4.2.1 Pathway Scope:

- Site inspection
- Traffic controls
- Subgrade preparation

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	20, 410 20 <sup>th</sup> St

The Town of Fort Macleod reserves the right to reject any and all bids. The Town has the right to select the proposal that best satisfies its interests and not necessarily on the basis of price or any other single factor.

- Scraping of current pathway materials off to the side
  - This will be used to finish edges after asphalt is laid
  - Ensure the top of asphalt is as close to grade as possible
- 200mm granular base
- 2m wide base for asphalt
- Asphalt paving
  - 2m wide
  - ~1000m long

#### 4.2.2 Parking Lot Scope

- Subgrade prep
  - Grade and level the parking lot
  - Removal of foliage on west side
  - 150mm subgrade
  - 200mm granular
- Tie in milling to Hwy 811 as required
- Asphalt paving
  - Approximately 1200 m<sup>2</sup>
  - Tie-in to Hwy 811
    - Traffic control
- Demob of equipment and waste materials

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	20, 410 20 <sup>th</sup> St

### 4.2.3 Wilderness Park Location / Area:

Figure 1



**Note:** Orange-highlighted rectangle designating area of work

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	20, 410 20 <sup>th</sup> St

Figure 2 Pathway



ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	<b>Brennan Orr, Director of Operations</b>	PO Box 142	0, 410 20 <sup>th</sup> St

Figure 3 Parking Lot



ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	20, 410 20 <sup>th</sup> St

# 5 Submission Requirements

Please forward your price quotations to the Town of Fort Macleod

**CLOSE DATE:** Friday, September 12, 2025, at 4 pm

#### **Electronically, Preferred**

Email Address: operations@fortmacleod.com

Subject Line: Include the RFQ Identification Number and Title

**Attention:** Brennan Orr, Director of Operations

#### **Hand delivered**

Address: 410-20<sup>th</sup> St. Fort Macleod, AB T0L 0Z0

#### **Standard Mail**

Attention: Brennan Orr

Town of Fort Macleod

Box 1420

Fort Macleod, AB T0L 0Z0

ToFM-FAC-RFQ-2025-015	Fort Macleod Pathways	Close Date	2025.09.12
operations@fortmacleod.com	Brennan Orr, Director of Operations	PO Box 142	.0, 410 20 <sup>th</sup> St